


LED Inground Lights

9-15V DC

OUTDOOR INSTALLATION

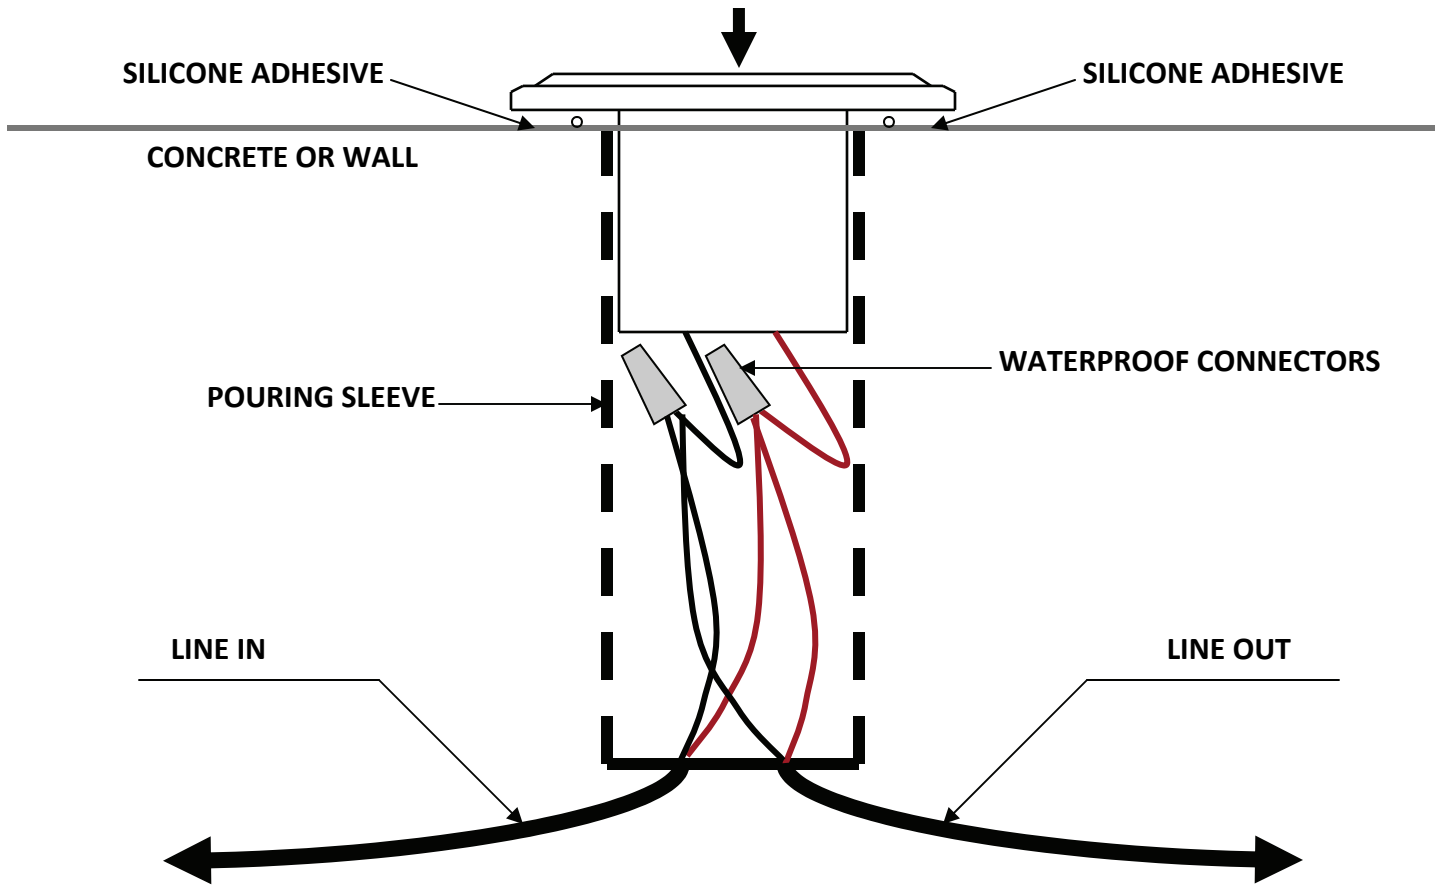

1. INSURE LINE IN AND LINE OUT WIRES COME UP OUT OF THE SLEEVE BY AT LEAST 2".
2. WATERPROOF WRAP AND ELECTRICAL TAPE SHOULD BE USED OVER CONNECTORS.
3. A SILICONE BEAD IS NEEDED AROUND INSIDE EDGE DIAMETER AS SHOWN.
4. PUSH DOWN GENTLY ON LIGHT FIXTURE TO SECURE AND LET DRY.

FOR INDOOR USE A 1.375" or 1 3/8" HOLE CUTTER IS NEEDED. SILICONE ADHESIVE SHOULD ALSO BE USED AS A HOLDER.

ITEM	LIGHT OUTPUT	LUMENOUS OUTPUT	CURENT DRAW	VOLTAGE	POWER CONSUMPTION
LAN IN-GROUND	22 WATTS	150-160 IL	180-200mA	9-15V DC	2 WATTS