

PART NUMBER 5CE470-15

SOURCE MATERIAL-----InGaN

EMITTING COLOR-----Blue

LENS TYPE-----WATER CLEAR

ABSOLUTE MAXIMUM RATING (Ta=25°C)

PULSE CURRENT (1/10 DUTY, 0.1 mS PULSE WIDTH)-----80mA

REVERSE VOLTAGE-----5.0V

OPERATING TEMPERATURE----- -40°C TO 85°C


STORAGE TEMPERATURE----- -40°C TO 100°

LEAD SOLDERING TEMPERATURE-----260°C FOR 3


SECONDS

CHARACTERISTICS (Ta=25°)

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
POWER DISSIPATION		Pd		76		mW
PEAK EMISSION WAVELENGTH	If=20mA	λ_P		468		nm
FORWARD VOLTAGE	If=20mA	VF		3.80		V
REVERSE CURRENT	VR=5V	Ir			50	μ A
LUMINOUS INTENSITY	If=20mA	Iv	800	1100	1700	mcd
VIEWING ANGLE	If=20mA	2 $\theta_{1/2}$		15		deg

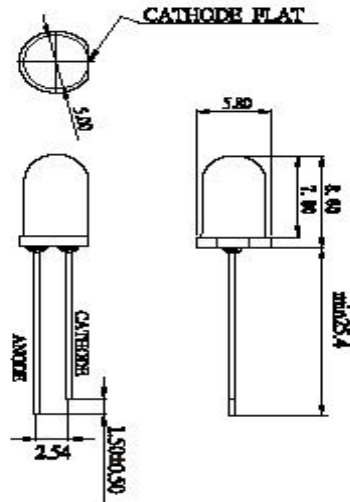

Beam... ..

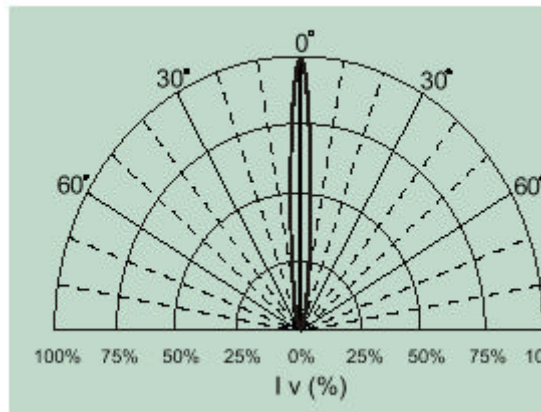

www.TheLEDLight.com
sales@TheLEDLight.com

Note:

- The dominant wavelength, λ_D , is derived from CIE 1931 Chromaticity Diagram and represents the emitting color of the device.
- The luminous intensity of the lamp is measured on the mechanical axis of the lamp. The optical axis is closely aligned with the package mechanical axis.
- Less than 10% of distribution have Iv around minimum value.
- More than 70% of the distribution are within the typical value (+/- 15%)
- Specifications are subject to change without notice