


Orange LED SPECIFICATIONS

Please print this page to avoid ordering errors. LEDs and reflectors are not returnable.

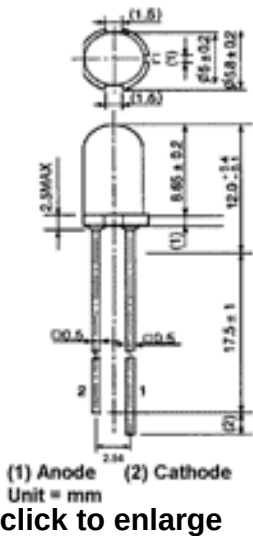

Toshiba TLOE20TP T-1 3/4 InGaAlP

Ultra Bright Orange LED

InGaAlP Technology

T-1 3/4 5 mm package

Water clear lens

Maximum Ratings (Ta = 25° C)

Characteristic	Symbol	Rating	Unit
Forward Current	I_F	50	mA
Reverse Voltage	V_R	4	V
Power Dissipation	P_D	120	mW
Operating Temperature	T_{opr}	-40 ~ 100	° C
Storage Temperature	T_{stg}	-40 ~ 120	° C

Opto-Electrical Characteristics (Ta = 25° C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V_F	IF = 20mA	--	2.0	2.4	V
Reverse Current	I_R	VR = 4V	--	--	50	mA
Luminous Intensity	I_v	IF = 20 mA	4760	10000	--	mcd
Viewing Angle	20 1/2	--	--	8	--	°
Peak Wavelength	λ_p	IF = 20 mA	--	612	--	nm
Dominant Wavelength	λ_d	IF = 20 mA	--	605	--	nm
Spectral Line Half Width	$\Delta\lambda$	IF = 20 mA	--	20	--	nm

TheLEDLight.com

Phone: 1-775-841-4490 Fax: 1-775-841-4491
sales@TheLEDLight.com